

Simulated impacts of climate change and land-clearing on runoff from a small Sahelian catchment

L. Séguis, B. Cappelaere,* G. Milési, C. Peugeot, S. Massuel and G. Favreau

U.M.R. Hydrosociences, Institut de Recherche pour le Développement (I.R.D.), Montpellier, France

Abstract:

In the Sahel, there are few long-term data series available to estimate the climatic and anthropogenic impacts on runoff in small catchments. Since 1950, land clearing has enhanced runoff. The question is whether and by how much this anthropogenic effect offsets the current drought. To answer this question, a physically based distributed hydrological model was used to simulate runoff in a small Sahelian catchment in Niger, from the 1950–1998 rain-series. The simulation was carried out for three soil surface states of the catchment (1950, 1975 and 1992). The catchment is characterized by an increase in cultivated land, with associated fallow, from 6% in 1950 to 56% in 1992, together with an increase in the extent of eroded land (from 7 to 16%), at the expense of the savanna. Effects of climate and land use are first analysed separately: irrespective of the land cover state, the simulated mean annual runoff decreases by about 40% from the wet period (1950–1969) to the dry period (1970–1998); calculated on the 1950–1998 rainfall-series, the changes that occurred in land cover between 1950 and 1992 multiplies the mean annual runoff by a factor close to three. The analysis of a joint climatic and anthropogenic change shows that the transition from a wet period under a ‘natural’ land cover (1950) to a dry period under a cultivated land cover (1992) results in an increase in runoff of the order of 30 to 70%. At the scale of a small Sahelian catchment, the anthropogenic impact on runoff is probably more important than that of drought. This figure for relative increase in runoff contributions to ponds, preferential sites of seepage to groundwater, is less than that currently estimated for aquifer recharge, which has been causing a significant continuous water table rise over the same period. Copyright © 2004 John Wiley & Sons, Ltd.

KEY WORDS Sahel; distributed modelling; climatic change; Hortonian runoff; land-cover change

INTRODUCTION

Current studies on climate variability emphasize the consequences of change for the environment. In tropical regions, drainage is particularly sensitive to any climatic changes. In sub-Saharan Africa, the occurrence of drought from the 1970s on has resulted in a decline in the flow rate of the largest rivers. For a 20% decrease in rainfall in comparison with the previous period (Nicholson *et al.*, 2000), the average annual discharge of the largest rivers in the region (Niger, Senegal) fell by 40% (Paturel *et al.*, 1997). Less dramatic rain shortage in recent years did not cause runoff to approach former averages (Bricquet *et al.*, 1997; Mahé *et al.*, 2000). Although the above-mentioned rivers have parts of their course in semi-arid, Sahelian countries, their contributing areas are located further south under much wetter, Guinean climate. Declining river flows have been reported for many humid watersheds in western and central Africa (Servat *et al.*, 1997).

Owing to distinctive features of the Sahelian environment (sandy soils, aeolian sand deposits, gentle slope, high evaporation and small annual number of rainfall events, which induce drainage network degradation and widespread endoreism), runoff generally accumulates to ponds (Desconnets *et al.*, 1997) or infiltrates along the drainage network: there are few significant Sahelian rivers and, consequently, very little long-term record of Sahelian runoff. In a study of the specifically Sahelian tributaries of the Niger River in Burkina Faso, Mahé

* Correspondence to: B. Cappelaere, IRD, UMR Hydrosociences, B.P. 64501, 34394 Montpellier Cedex 5, France.
E-mail: bernard.cappelaere@mpl.ird.fr

et al. (2003) report an increase in discharge over the past 40 years, contrasting with the observed rainfall reduction. In the major part of the Sahel, runoff occurs only at a local scale within small catchments, none of which has been monitored continuously over as long a period. Sites where observations were made both in the wet 1950s and during the later drought years are extremely rare. From aerial photograph comparison and village inquiries in the area of the Hapex-Sahel experiment (Goutorbe *et al.*, 1994) in south-western Niger, Favreau (2000) gathered qualitative evidence of increased runoff over the past 50 years, which includes significantly more abundant runoff-fed pool water (larger pond number and volumes) and increased gullying (see also Favreau *et al.*, 2002b). In two catchments in Burkina Faso under Sudanese climate (700–950 mm of annual rainfall), Albergel (1987), using a hydrological model, showed that the present decrease in rainfall seems to be widely compensated for by runoff caused by environmental changes. These environmental changes consist mainly of the extension of cultivated land required by a dramatic population increase: in the Sahel, a steady growth rate of 3% a year has caused the population to double every 20 years since the Second World War (Le Houérou, 1993). Under the influence of this demographic pressure, natural areas have been cleared and cultivated; and since this land has less vegetation, it is then more prone to erosion by wind and water (Bajracharya and Lal, 1999). Subsequently, when all the arable land has been exploited, a decrease in the duration of fallow is observed (Loireau, 1998). All these factors contribute to degradation of the environment, resulting in crusting of the soil surface (Valentin, 1994), which enhances surface runoff. Unlike more humid watersheds where the climatic factor appears to dominate the hydrological response, Sahelian runoff seems to be more dependent on land surface conditions, the effects of which mask the rainfall decline. This contrast may be explained by differences in hydrological processes between the two regions, i.e. mainly infiltration and subsurface/‘contributing-area’ processes in wetter areas, versus surface runoff and Hortonian processes in the Sahelian zone. Pouyaud (1987) suggested that groundwater drying-up is responsible for the lasting discharge decrease in humid catchments. In Sahelian areas, the water table is generally too deep below the land surface to affect surface water.

In fact, in the Hapex-Sahel area, the Continental Terminal groundwater has been undergoing a continuous, regional rise for over 40 years, as described by Leduc *et al.* (1997, 2001). The authors attribute this to the anthropogenic increase in surface runoff that accumulates into a large number of endoreic ponds where it can infiltrate to the water table. They rule out (Favreau *et al.*, 2002b) the hypothesis of diffuse groundwater recharge under millet fields (Gaze *et al.*, 1998; Bromley *et al.*, 2002) as a major mechanism. The aim of the present paper is to produce estimates for possible fluctuations of runoff to a typical pond in the area since the 1950s, and compare them with the observed groundwater rise. Owing to the lack of surface water data before 1992, a hydrological model (Cappelaere *et al.*, 2003b; Peugeot *et al.*, 2003) is used to explore by simulation the changes in runoff to the Wankama pilot pond in relation to climatic and environmental changes over the past 50 years. In the first part of the paper, catchment characteristics and modelling methods based on available data are presented. Next, results of simulations are used to assess the respective influences of climate and environment modifications on surface water resources. Finally, the simulated changes in pond recharge are compared with the groundwater information for the period.

STUDY SITE AND HYDROLOGICAL FUNCTIONING

The region to the east of Niamey is occupied by the Miocene sandy-loamy sediments of the Continental Terminal covered locally with dunes from the late Quaternary. The landscape appears as an armoured laterite plateau cut by wide fossil valleys called locally *Koris*. The hydrographic network inherited from wetter conditions during the Quaternary no longer functions. During the rainy season (June–September), the lowest parts of valleys are occupied by a series of ponds that collect the runoff from the hillsides in a mosaic of disconnected endoreic catchments of only up to a few square kilometres. Typically in this region, the depth to the water table varies from at least 15–30 m (below ponds) to well over 60 m; therefore surface- and groundwaters show only a one-way connection, that is aquifer recharge. Runoff occurs as Hortonian overland flow.

During the most intense rain events, ponds may overflow from one to the other. Hydrographic degradation characterized by interruption of concentrated drainage is the major feature of the hydrological functioning. This degradation is encountered in valleys blocked with sandy bolts but also on hillslopes between the plateau and the valley bottom. The plateau escarpment is relatively steep and thus favours runoff. The sheet flow is rapidly concentrated in 1–2 m deep gullies with sandy beds. However, owing to the decrease in the steepness of the slope of the hillsides, the gullies rapidly decrease in depth and split into multiple arms forming spreading zones where the majority of runoff is absorbed. After crossing these zones, the remainder of the flow is again concentrated in gullies thanks to flow contributions from the downhill part of the catchment. Finally, the flow ends in ponds located in the beds of former streams.

The Wankama catchment presents all the features of the above description and is representative of the area. It is located between a plateau at an altitude of 265 m and the valley of the so-called Dantiandou Kori at an altitude of 200 m. The surface area is 1.9 km² and the mean slope is 2%. In the middle of the hillside, the gully presently forms a spreading zone about 225 m in width and 400 m in length. Below the spreading zone, the gully flows into a pond in the bed of the Kori. Pond water levels and rainfall have been recorded since 1992 (Peugeot *et al.*, 2003). Aerial photography was carried out in 1950, 1975 and 1992 for topographic purposes, providing us with ortho-photos of the catchment at these dates. Although a break in the gully is distinguishable in the photos taken in 1950 and 1975, it is difficult to quantify the extension of the spreading zone. Further details on the study site and on the area's hydrology can be found in Peugeot *et al.* (2003).

LAND-USE CHANGES DURING THE PAST 50 YEARS

Casenave and Valentin (1992) developed the concept of 'soil surface features' to characterize the infiltration/runoff properties of the various types of soil surfaces encountered in the Sahel region. As explained below, Casenave and Valentin's classification (1992) associates with each soil surface feature class an estimate of the infiltration rate derived from rainfall simulation experiments. Based on this concept, d'Herbès and Valentin (1997) produced a soil surface feature map for the Niamey area including the Wankama catchment for 1992, by classifying SPOT multispectral images at a resolution of 20 m together with transects obtained from field surveys. Similarly, we interpreted the photographs taken in 1950 and 1975. The resulting three instantaneous maps of the catchment taken at an interval of about 20 years are presented in Figure 1 (surface types have been simplified to four classes in the figure for legibility). Area distributions are given in Table I. It may be noted that a radical change in the landscape has taken place over the past 50 years. In 1950, the catchment presented a natural land cover of shrub savanna, with crops occupying only 6% of the catchment near the pond. In 1975, the crop–fallow system represented 17% of the catchment area, with fields spread over the lower part of the catchment. Land clearing and cropping resulted in a degradation of the environment: with regard to the 1950 map, degraded surfaces with hard crusting and sparse vegetation had expanded from 7 to 21%. By 1992, the crop–fallow system had become predominant in the catchment (56%). Although it is possible to quantify the major features of changes in the catchment by interpreting the photographs, some uncertainties remain: for example it is difficult to imagine a decrease in degraded surface areas from 21% in 1975 to 17% in 1992. No restoration or conservation practices likely to slow down or even inverse degradation processes were undertaken during this period. This variation may be attributable to an overestimation of degraded areas in 1975: certain fields of intense brightness may have been allocated to this class by mistake. The landscape's drastic change should be considered in the context of the demographic explosion in the region. Loireau (1998), on a nearby site, determined that the population had increased by a factor of 18 between 1950 and 1995.

Casenave and Valentin (1992) built their classification of the various soil surface conditions encountered in the Sahel region on the basis of rainfall simulation data from 87 plots, using as criteria the key factors in terms of hydrological behaviour: surface crust type, faunal activities (e.g. termites), woody and herbaceous vegetation cover, and surface roughness. Soil surface feature units can be mapped from field survey (Valentin,

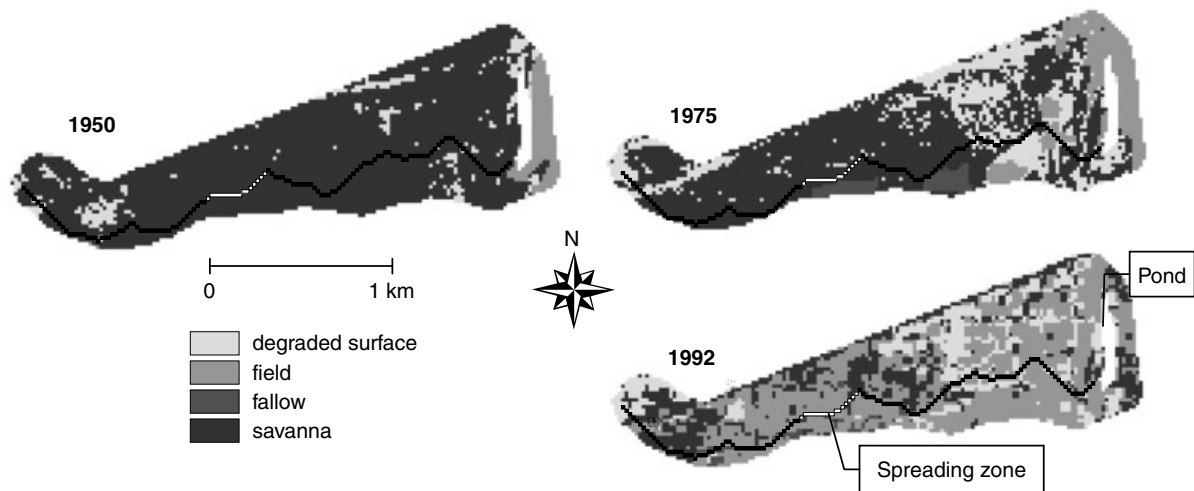


Figure 1. Surface feature maps of the Wankama catchment during the past 50 years

Table I. Occupation rates and hydraulic characteristics of surface features of the Wankama catchment (K_s , saturated hydraulic conductivity; n , Manning's coefficient)

Class	Surface area (%)			K_s ($\times 10^{-7} \text{ m s}^{-1}$)	n ($\times 10^{-3} \text{ m}^{-1/3} \text{ s}$)
	1950	1975	1992		
Field	6.0	13.4	53.9	36	130
Fallow	0.0	3.2	1.9	56	149
Sparse shrub savanna	57.4	55.9	23.9	56	174
Dense shrub savanna	19.1	0.0	0.0	56	200
Dense vegetation thicket	8.6	4.3	0.2	111	277
Degraded hillslope	3.1	9.4	6.4	8	46
Highly degraded hillslope	3.6	11.9	10.5	11	15
Sparse vegetation: plateau	1.4	0.0	0.5	111	277
Bare soil: plateau	0.8	1.9	2.6	6	20

1986) or from remote sensing image analysis (Lamachère and Puech, 1996). The infiltration rate estimates derived by Casenave and Valentin (1992) from the rainfall simulation experiments are consistent with direct measurements of saturated hydraulic conductivity, K_s (Valentin, 1991; Peugeot *et al.*, 1997; Vandervaere *et al.*, 1997). Based on Casenave and Valentin's table (infiltration versus surface feature class), a 20-m resolution K_s map can be obtained for each of the three epochs considered here, by reclassifying the respective land surface maps according to Table I. The same can be done for the Manning roughness parameter (n), using estimates produced by Desconnets *et al.* (1996) for the surface feature classes encountered in the Niamey area (Table I). More information on the hydraulic parameter values used for the Wankama catchment model can be found in Peugeot *et al.* (2003).

The mean saturated hydraulic conductivity of the catchment is equal to 57, 45 and $37 \times 10^{-7} \text{ m s}^{-1}$ for the respective land surfaces in 1950, 1975 and 1992. At the same dates, the mean Manning roughness parameter is equal to 0.176, 0.138 and $0.122 \text{ m}^{-1/3} \text{ s}$, respectively. At the scale of the whole catchment, under the same rainfall conditions, runoff should increase from the 1950 state to the 1992 state, because infiltration (K_s) decreases and the routing time related to the roughness coefficient (n) decreases. Owing to low resolution with respect to gully width, the drainage network is not taken into account in the statistics given in Table I. It is

assigned values of $K_s = 1250 \times 10^{-7} \text{ m s}^{-1}$ (450 mm h^{-1}) and $n = 0.03 \text{ m}^{-1/3} \text{ s}$, which are representative of a small, clean sandy bed.

HYDROLOGICAL MODEL

Sahelian rainstorms are mainly convective systems, i.e. of high intensity and short duration (d'Amato and Lebel, 1998; Lebel *et al.*, 1997). Runoff is thus Hortonian: overland flow occurs when the rainfall rate is greater than the K_s of the surface layer. All simulations have been performed with the physically based, two-dimensional, distributed model *r.water.fea* (Vieux and Gaur, 1994), after it was upgraded and implemented by Cappelaere *et al.* (2003b) and Peugeot *et al.* (2003) for the Wankama catchment. The model runs in the GRASS GIS environment (USACE, 1993) over a raster grid. Maps of the watershed geometry (catchment and channel network layout, rasterized drainage directions) produced from a DEM (digital elevation model) by GRASS's *r.watershed* function, define the discrete model structure. The production and routing functions are fully coupled, allowing simulation of runoff from and run-on to each cell of a raster grid within the catchment. The kinematic-wave, Manning and Green–Ampt equations are solved concurrently using finite-elements in space and an explicit finite-difference scheme in time (Vieux, 2001; Séguis *et al.*, 2002). Model parameters (saturated conductivity, capillary pressure head at the wetting front, Manning coefficient) as well as land slope are handled as GRASS raster maps. Although *r.water.fea* can be run with distributed rainfall maps, only spatially uniform rainfall is considered here. The model is operated on an event basis: an initial soil moisture map is input to the model, which, for the purposes of the present simulation, is considered to be uniform over the whole catchment, as explained below. The initial soil moisture is deduced from an Antecedent Precipitation Index calibrated on observed soil values monitored during 2 years (Peugeot *et al.*, 2003). A uniform value of 20 cm is taken for the capillary pressure head at the wetting front H_f .

The Wankama model was calibrated and validated by Cappelaere *et al.* (2003b) on rainfall–runoff events that occurred from 1992 to 2000. The fitting parameters are dimensionless scaling factors, of which there are three, K , C and M . These scaling factors are applied to the a priori values of the model's hydraulic parameters: K is the uniform multiplier applied to the 1992 raster map of spatially distributed values of hillslope hydraulic conductivity, C is the one applied to channel hydraulic conductivity and M is applied to the 1992 map of Manning's roughness coefficient. The relative spatial patterns within each map are thus preserved. Optimal values were found to be $K = 0.75$, $C = 1$ and $M = 1.25$. When expressed as an equivalent to the Nash–Sutcliffe efficiency coefficient, performance in calibration, cross-validation and split-sample test is always largely above 90%, meaning that the model is able to reproduce the observed catchment behaviour for the 1992–2000 period very correctly. It can be noted that optimal multiplicative factors are moderate: fitted hydraulic characteristics differ by only 25% from the prescribed values in Table I. The uncalibrated model also performs acceptably well, with an equivalent Nash–Sutcliffe efficiency coefficient also above 90%. There does not seem to be any parameter drift over the 1992–2000 period. Parameter and predictive uncertainty was analysed by Cappelaere *et al.* (2003b). Cappelaere *et al.* (2003a) showed that the resulting uncertainty is quite small for seasonal pond recharge prediction: it is in the order of 10% for annual predictions and 3% for interannual mean over the 1992–2000 period.

It is assumed that, owing to this parameterization scheme and limited-calibration approach (a small number of degrees of freedom favours capture of actual catchment properties, rather than noise in the data), model calibration and uncertainty analysis are not tied to the present land-use situation, i.e. that the hydraulic scaling factors can be transposed to the 1950 and the 1975 land maps. Taking this stand is reasonable given the physically based, fully spatially distributed nature of the model, with an explicit representation of the detailed structure of this small catchment, as opposed to more conceptual, lumped models, which would require recalibration. Good performance of the uncalibrated model and proximity of calibrated parameters to their prior values lend credit to the quality of model construction, and back model transposition to different land-cover states, consisting in new spatial distributions of the same land units.


SIMULATION PROTOCOL

For each of the three soil surface states of the Wankama catchment, runoff is calculated with the *r.water.fea* model for the 1950–1998 rainfall series. Rainfall recording only began in 1992 at Wankama. We therefore used data from the closest long-duration station, at Niamey Airport (60 km to the west). Over the long term, the Niamey airport series is statistically representative of rainfall in Wankama (Lebel *et al.*, 1997). Mean annual rainfall decreased from 646 mm before 1969 to 493 mm since then, i.e. a decline of about 24% (Figure 2). This marked decrease and the date of the break are comparable to those observed at other Sahelian sites (Hulme, 1992; d'Amato and Lebel, 1998). We distinguish a wet period (1950–1969) and a dry period (1970–1998).

All daily rainfall amounts are available but there are gaps in the records of instantaneous rainfall intensities. To fill these gaps and obtain a complete series, we proceeded in the following way: (i) based on their total precipitation amount, observed hyetographs were pooled into 5mm-wide depth classes; (ii) for a rainfall day with no available hyetograph, a hyetograph was randomly selected from the class with the same rainfall depth.

A stationarity study of the Niamey rainstorm characteristics over 1956–1998 showed significant changes in the structure of the hyetographs especially for the events between 20 and 35 mm, before and after 1969 (Lubès-Niel *et al.*, 2001). The missing hyetographs for a given period were selected randomly from among the available hyetographs in the same period and rain-depth class. Before 1956, the precision and reliability of the rain gauge was insufficient to calculate intensity at a 5-min time-step. Consequently, from 1950 until 1955, the entire hyetograph series was generated. After 1990 there are no more gaps thanks to the installation of a pluviograph with an electronic clock and magnetic storage.

The reconstituted pluviographic series from 1950 until 1998 contains 2909 events, of which 38% were generated. The lowest rainfall depths (less than 10 mm) represent the majority (71%) of the generated events. From five generated series, we verified that the average coefficient of variation of annual rainfall is low. In a preliminary simulation, we also verified that annual runoff is relatively insensitive to the stochastic nature of the hyetogram series. The whole study is thus made with one series selected from the five. To find the optimal (K , C , M) triplet, we retained 23 other triplets that can correctly reproduce the runoff events of the calibration period (1992–1998) (Cappelaere *et al.*, 2003b). Owing to the difficulty of measuring the extent of the spreading zone using the photographs taken in 1950 and 1975, we used the dimensions of the existing spreading zone (400 m long by 225 m wide) as a reference. We used a spreading zone width equal to that of the rest of the channel (2 m). A total of 144 simulations were performed by three surface feature maps by two spreading zone widths, over the



obtained with the optimal (K, C, M) triplet, we added the interval of variation of runoff calculated with the 23 other (K, C, M) sets.

As we anticipated at the end of the land-use section, irrespective of annual rainfall, the runoff calculated with the optimal parameter set increases when changing the landscape from the 1950 state to the 1992 state. By analysing the intervals of runoff variation, it will be noted that whatever the (K, C, M) triplet, runoff produced with the 1950 surface feature map is systematically lower than that produced with the 1992 surface feature map. Runoff intervals overlap only between the intermediate 1975 surface feature map and the two extremes (in 1950 or 1992). On average over the 1950–1998 rain-series, the annual runoff almost tripled between the catchment with natural vegetation (1950) and the cropped catchment (1992) (see Table II; values presented in this table and in the rest of the paper are those obtained for the optimal calibrated parameter set). Annual runoff nearly doubled between the 1950 and the 1975 soil surface states. Even though the field-fallow rate in the 1975 catchment remains small (17%) and natural vegetation remains prominent (60%), this doubling is probably owed to the increase in eroded surfaces (from 7 to 21%) mostly in the lower part of the catchment.

Increasing the spreading zone width alone lowers annual runoff by only 18 to 24%: runoff variations connected to a modification in the spreading zone appear to be of second order in comparison with those owing to changes in land use.

Climatic change

For every land surface state, we calculated and compared the average runoff over the wet (1950–1969) and dry (1970–1998) periods. The decrease in rainfall (23%) between the two periods is amplified by the watershed: the runoff decrease ranges from 37 to 40% (Table III), i.e. it is nearly independent of land use and of spreading zone width. Figure 4 shows the contributions of each of the nine rainfall depth classes to the total deficits (wet to dry period) in rain (observed) and in runoff (simulated, with 1992 land use and a 225-m spreading zone width). Rainstorms with less than 20 mm depth represent a third of the rainfall deficit but only 3% of the runoff deficit. Runoff deficit is essentially due to heavy rainstorms: rainstorms of more than 30 mm (55% of the rainfall deficit) generate 84% of the runoff deficit.

Table II. Ratios of mean annual runoff for each land-cover map (V_{1950} , V_{1975} and V_{1992}), with two spreading zone widths (2 and 225 m)

Spreading zone width	V_{1992}/V_{1950}	V_{1992}/V_{1975}	V_{1975}/V_{1950}
2 m	2.6	1.5	1.7
225 m	2.8	1.5	1.8

Table III. Mean annual runoff for each land cover (V_{1950} , V_{1975} and V_{1992}) and relative deficit from wet (1950–1969) to dry (1970–1998) climatic period

	Rainfall (mm)	Spreading zone 2 m			Spreading zone 225 m		
		V_{1950} (mm)	V_{1975} (mm)	V_{1992} (mm)	V_{1950} (mm)	V_{1975} (mm)	V_{1992} (mm)
1950–1969 period	645.8	27.7	47.2	71.6	21.1	38.8	58.1
1970–1998 period	497.7	17.2	28.6	44.7	13.0	23.3	36.3
Relative wet to dry period deficit	0.23	0.38	0.40	0.37	0.38	0.39	0.38

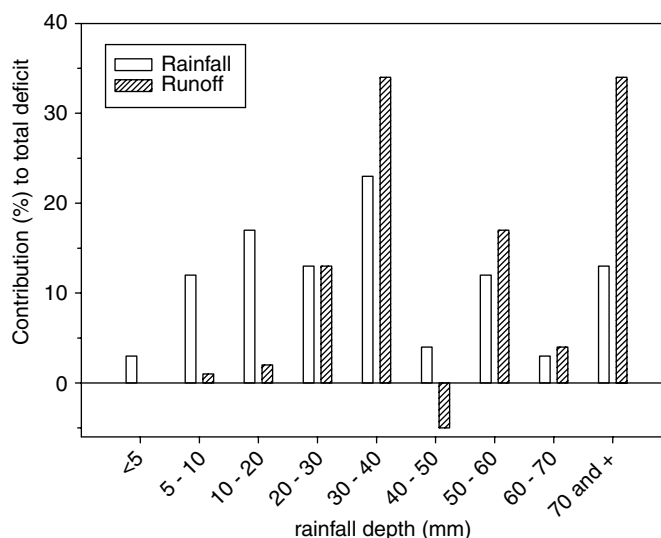


Figure 4. Relative contributions of rainfall depth classes to the total rainfall and runoff deficits (wet period minus dry period); runoff deficits are calculated for the 1992 land use and the 225 m spreading zone

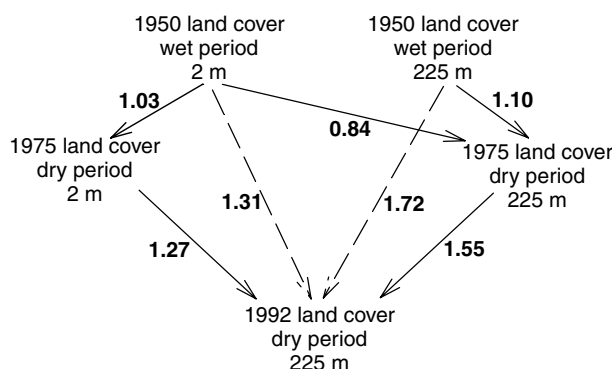


Figure 5. Ratios of changes in simulated mean annual runoff (bold numbers) for realistic environmental and climatic scenarios including spreading zone hypotheses, over the past 50 years

Combined climatic and environmental modifications

Climatic and environmental changes having been dealt with separately, we now present the impact on runoff of combined changes. Figure 5 shows plausible scenarios for the 50-year period: there is not just one scenario because the spreading zone width is uncertain for 1950 and 1975. It can be seen that simulated runoff is significantly larger in 1992 than in any of the previous situations. Depending on the spreading zone hypothesized for 1950, relative increase in runoff from 1950 to 1992 is 31 or 72%. Comparison of the two successive phases of landscape and climatic changes (1950–1975 and 1975–1992) shows that, no matter which spreading zone hypothesis, runoff increase is higher in the second phase where only environment change occurs.

DISCUSSION AND CONCLUSION

The proposed objeccurs.

interpretation of available photographs (taken in 1950, 1975 and 1992) and the transcription of the soil surface features into hydraulic parameters by Casenave and Valentin's method (1992) enabled hydrological characterization to be carried out.

As expected in this area, past land-use changes alone were found to greatly increase runoff. Lørup *et al.* (1998) pointed out that significant rural population densification does not systematically entail increased surface runoff everywhere in semi-arid Africa: working in Zimbabwe on six larger catchments with 620–800 mm annual rainfall, they found a tendency for a slight decrease in annual runoff (noise as a result of climate variability having been removed). In this case, land-use modifications essentially consisted in crop substitution (from fi

A more likely explanation could be a change in the infiltration process to the water table that has increased pond efficiency with respect to aquifer recharge. Today, pond water levels are higher than in the past: infiltration now affects the sandy edges of the pond that are less clogged by clay deposits than the centre (Desconnets *et al.*, 1997). Also, most of the formerly abundant tree vegetation around the ponds has since been cleared, with a possibly large reduction in evaporative losses. Another probable factor is the following: as a consequence of enhanced surface runoff since 1950, new ponds have appeared in the landscape.

- Casenave A, Valentin C. 1992. A runoff capability classification system based on surface features criteria in semi-arid areas of West Africa. *Journal of Hydrology* **130**: 231–249.
- d'Amato N, Lebel T. 1998. On the characteristics of the rainfall events in the Sahel with a view to the analysis of climate variability. *International Journal of Climatology* **18**: 955–974.
- Desconnets JC, Vieux BE, Cappelaere B, Delclaux F. 1996. A GIS for hydrological modelling in the semi-arid, Hapex-Sahel experiment of Niger, Africa. *Transaction in GIS* **1**(2): 82–94.
- Desconnets JC, Taupin JD, Lebel T, Leduc C. 1997. Hydrology of the Hapex-Sahel Central Super-Site: surface water drainage and aquifer recharge through the pool systems. *Journal of Hydrology* **188–189**(1–4): 155–178.
- d'Herbes JM, Valentin C. 1997. Land surface conditions of the Niamey region: ecological and hydrological implications. *Journal of Hydrology* **188–189**(1–4): 18–42.
- Favreau G. 2000. *Caractérisation et modélisation d'une nappe phréatique en hausse au Sahel*. Thesis, Université Paris XI—Orsay, France; 258.
- Favreau G, Leduc C, Marlin C, Dray M, Taupin JD, Massault M, Le Gal La Salle C, Babic M. 2002a. Estimate of recharge of a rising water table in semiarid Niger from ^3H and ^{14}C modeling. *Ground water* **40**: 144–151.
- Favreau G, Leduc C, Schroeter P. 2002b. Reply to comment on 'Long-term rise in a Sahelian water-table: the continental terminal in south-west Niger' by Leduc C, Favreau G, Schroeter P. *Journal of Hydrology* **255**: 263–265.
- Gash JHC, Kabat P, Monteny BA, Amadou M, Bessemoulin P, Billing H, Blyth EM, deBruin HAR, Elbers JA, Friborg T, Harrison G, Holwill J, Lloyd CR, Lhomme JP, Moncrieff JB, Puech D, Soegaard H, Taupin JD, Tuzet A, Verheof A. 1997. The variability of evaporation during the Hapex-Sahel intensive observation period. *Journal of Hydrology* **188–189**(1–4): 385–399.
- Gaze SR, Brouwer J, Simmonds LP, Bromley J. 1998. Dry season water use patterns under *Guiera senegalensis* L. shrubs in a tropical savanna. *Journal of Arid Environments* **40**: 53–67.
- Goutorbe JP, Lebel T, Tinga A, Bessemoulin P, Brouwer J, Dolman AJ, Engman ET, Gash JHC, Hoepffner M, Kabat P, Kerr YH, Monteny B, Prince S, Said F, Sellers P, Wallace JS. 1994. Hapex-Sahel: a large-scale study of land atmosphere interactions in the semi-arid tropics. *Annalae Geophysicae* **12**: 53–64.
- Hulme M. 1992. Rainfall changes in Africa: 1931–1960 to 1961–1990. *International Journal of Climatology* **12**: 685–699.
- Lamachère JM, Puech C. 1996. Cartographie des états de surface par télédétection et prédétermination des crues des petits bassins versants en zone sahélienne et tropicale sèche. In *L'hydrologie tropicale géoscience et outil pour le développement, 2–4 May 1995*. IAHS publication 238, International Association of Hydrological Sciences: Wallingford; 235–248.
- Lebel T, Taupin D, d'Amato N. 1997. Rainfall monitoring during Hapex-Sahel. 1. General rainfall conditions and climatology. *Journal of Hydrology* **188–189**(1–4): 74–96.
- Leduc C, Loireau M. 1997. Fluctuations piézométriques et évolution du couvert végétal en zone sahélienne (sud-ouest du Niger). In *Sustainability of Water Resources under Increasing Uncertainty, Rabat, 23 April–22 May 1997*. IAHS Publication 240, International Association of Hydrological Sciences: Wallingford; 193–200.
- Leduc C, Favreau G, Schroeter P. 2001. Long-term rise in a Sahelian water-table: the continental terminal in south-west Niger. *Journal of Hydrology* **243**: 43–54.
- Le Houérou HN. 1993. Changements climatiques et désertisation. *Sécheresse* **4**: 95–111.
- Léonard JL, Rajot JL. 2001. Influence of termites on runoff and infiltration: quantification and analysis. *Geoderma* **104**: 17–40.
- Loireau M. 1998. *Espaces, ressources, usages: spatialisation des interactions dynamiques entre les systèmes sociaux et les systèmes écologiques au Sahel nigérien*. Thesis, Université Montpellier III, France; 400.
- Lørup JK, Refsgaard JC, Mazvimavi D. 1998. Assessing the effect of land use change on catchment runoff by combined use of statistical tests and hydrological modelling: Case studies from Zimbabwe. *Journal of Hydrology* **205**: 147–163.
- Lubès-Niel H, Séguis L, Sabatier R. 2001. Étude de stationnarité des caractéristiques des événements pluvieux de la station de Niamey sur la période 1956–1998. *Comptes Rendus de l'Académie des Sciences—series IIa* **333**: 645–650.
- Mahé G, Olivry JC, Dessouassi R, Orange D, Bamba F, Servat E. 2000. Relations eaux de surface-eaux souterraines d'une rivière tropicale au Mali. *Comptes Rendus de l'Académie des Sciences—series IIa* **330**: 889–892.
- Mahé G, Leduc C, Amani A, Paturel JE, Girard S, Servat E, Dezetter A. 2003. *Hydrology of Mediterranean and Semiarid Regions, Montpellier, April 2003*. IAHS Publication 278, International Association of Hydrological Sciences: Wallingford; 215–222.
- Nicholson SE, Some B, Kone B. 2000. An analysis of recent rainfall conditions in West Africa, including the rainy seasons of the 1997 El Niño and the 1998 La Niña years. *Journal of Climate* **13**: 2628–2640.
- Paturel JE, Servat E, Kouamé E, Lubès H, Fritsch JM, Masson JM. 1997. Manifestations d'une variabilité hydrologique en Afrique de l'Ouest et Centrale. In *Sustainability of Water Resources under Increasing Uncertainty, Rabat 23 April–22 May 1997*. IAHS Publication 240, International Association of Hydrological Sciences: Wallingford; 21–30.
- Payne WA. 1999. Shallow tillage with a traditional West African hand hoe to conserve soil water. *Soil Science Society of America Journal* **63**: 972–976.
- Peugeot C, Estèves M, Galle S, Rajot JL, Vandervaere JP. 1997. Runoff generation, processes: results and analysis of field data collected at the East Central Supersite of the Hapex-Sahel experiment. *Journal of Hydrology* **188–189**(1–4): 179–202.
- Peugeot C, Cappelaere B, Vieux BE, Séguis L, Maia A. 2003. Hydrologic process simulation of a semiarid, endoreic catchment in Sahelian West Niger: 1. Model-aided data analysis and screening. *Journal of Hydrology* **279**(1–4): 224–243.
- Pouyaud B. 1987. Variabilité spatiale et temporelle des bilans hydriques de quelques bassins versants d'Afrique de l'ouest en liaison avec les changements climatiques. In *The Influence of Climate Change and Climatic Variability on the Hydrologic Regime and Water Resources, Vancouver, 9–22 August 1987*. IAHS Publication 168, International Association of Hydrological Sciences: Wallingford; 447–461.
- Séguis L, Cappelaere B, Peugeot C, Vieux B. 2002. Impact on Sahelian runoff of stochastic and elevation induced spatial distributions of soil parameters. *Hydrological processes* **16**: 313–322.
- Servat E, Paturel JE, Lubès-Niel H, Kouamé B, Travaglio M, Marieu B. 1997. De la diminution des écoulements en Afrique de l'Ouest et centrale. *Comptes Rendus de l'Académie des Sciences—series IIa* **325**: 679–682.

- USACE. 1993. *GRASS 4.1 User's Reference Manual*. Construction Engineering Research Laboratories, US Army Corps of Engineers: Champaign, IL.
- Valentin C. 1986. Différencier les milieux selon leur aptitude au ruissellement: une cartographie adaptée aux besoins hydrologiques. In *Premières Journées hydrologiques de l'Orstom à Montpellier, 17–18 September 1985*. Orstom Publications: Paris; 50–74.
- Valentin C. 1991. Surface crusting in two alluvial soils of northern Niger. *Geoderma* **48**: 201–222.
- Valentin C. 1994. Sécheresse et érosion au Sahel. *Sécheresse* **5**: 191–198.
- Vandervaere JP, Peugeot C, Vauclin M, Angulo Jaramillo R, Lebel T. 1997. Estimating hydraulic conductivity of crusted soils using disc infiltrometers and minitensiometers. *Journal of Hydrology* **188–189**(1–4): 203–223.
- Vieux BE. 2001. *Distributed hydrologic modeling using GIS*. Water Science and Technology Library, Vol 38. Kluwer Academic: London, UK; 293 pp.
- Vieux BE, Gaur N. 1994. Finite-element modeling of storm water runoff using GRASS GIS. *Microcomputers in Civil Engineering* **9**: 263–270.