

EGU24-11014, updated on 08 Mar 2024
<https://doi.org/10.5194/egusphere-egu24-11014>
EGU General Assembly 2024
© Author(s) 2024. This work is distributed under
the Creative Commons Attribution 4.0 License.



Improvement of contaminant retention with the use of biochar in the groundwater infiltration basin of Korba (Tunisia)

Claude Hammecker ¹, Hadhemi Maalaoui^{1,3}, Asma Hmaied  ^{1,2}, and Fethi Lachaal⁴

¹LISAH, Univ. Montpellier, INRAE, IRD, SupAgro, Montpellier, France (claude.hammecker@ird.fr)

²INAT, avenue Charles Nicolles, Tunis, Tunisia (asma.hmaied@ird.fr)

³Faculté des Sciences et Technique de Tunis, El Manar, Tunis, Tunisia (maalaoui.hadhem@ird.fr)

⁴CERTE, route touristique, Borj Cédria, Tunis, Tunisia (lachaalfethi@gmail.com)

The overexploitation of the Korba aquifer (Cap Bon, North Tunisia) has led to the drawing down of its static water level and the degradation of its quality due to the intrusion of saline water from the sea. To address this situation, treated wastewater is used for the artificial recharge of the aquifer through three infiltration basins.

Treated wastewater is known to carry various emerging contaminants and pharmaceuticals as they are often not retained in traditional wastewater treatment plants. To tackle this problem the use of biochars is often recommended to conduct a second stage low-cost decontamination strategy. Indeed, biochar can be produced easily at a low cost, with different agricultural residues. In this study, the impact of biochar derived from Rosemary, Bamboo, St. John's Wort, Olive, Cypress, and Palm Trees on the mobility and retention of emerging contaminants was evaluated.

The first stage of this work was to evaluate the potential retention capacity of the different biochars produced in a low-cost metallic kiln with local biomass residues. Therefore we used Methylene Blue (MB) as a proxy for organic contaminants to establish adsorption isotherms to quantify their respective specific surface area and adsorption capacities.

The adsorption isotherms at 20°C were established to evaluate their respective specific surface areas and were fitted to different adsorption models.

The surface functional groups of biochars were characterized by FTIR spectroscopy.

The analysis of the results showed that the biochar obtained from Rosemary, Bamboo, and St. John's Wort exhibited remarkable elimination and better adsorption capacity with

values of 1.6g/L for Rosemary, 0.4g/L for St. John's Wort, and 0.2g/L for Bamboo. An average adsorption capacity was observed with 0.09g/L for Cypress, 0.055g/L for Olive, and low adsorption with a value of 0.03g/L for traditional Olive and Palm Trees.

The second stage was to test the dynamic retention properties of biochar on soil monolith experiments, where the MB elution curves were analyzed with and without the addition of biochar. The presence of biochar in the soil monoliths drastically reduced the retention of MB, demonstrating its efficiency as an adsorbent filter. These results underscore the strong potential of biochar in water treatment to enhance quality by reducing pollution.

How to cite: Hammecker, C., Maalaoui, H., Hmaied, A., and Lachaal, F.: Improvement of contaminant retention with the use of biochar in the groundwater infiltration basin of Korba (Tunisia), EGU General Assembly 2024, Vienna, Austria, 14–19 Apr 2024, EGU24-11014, <https://doi.org/10.5194/egusphere-egu24-11014>, 2024.

Comments on the supplementary material

AC: Author Comment | CC: Community Comment |  Report abuse

[supplementary materials version 1](#) – uploaded on 12 Apr 2024, **no comments**

Improvement of contaminant retention with the use of biochar in the groundwater infiltration basin of Korba (Tunisia)

Claude Hammecker ¹, Hadhemi Maalaoui ^{1,2}, Asma Hmaied ^{1,2} and Fethi Lachaal ³

¹ Institut de Recherche pour le Développement, UMR LISAH, Montpellier, France (asma.hmaied@ird.fr), (claude.hammecker@ird.fr)

² University of Tunis El Manar, Faculty of Sciences of Tunis, Tunis, Tunisia (asma.hmaied@ird.fr), (maalaoui.hadhem@gmail.com)

³ Centre de Recherches et Technologies des Eaux, Borj Cedria, Tunisia (lachaalfethi@gmail.com)



This presentation participates in OSPP
EGU
Outstanding Student & PhD candidate Presentation contest

Sharing is encouraged

1. ABSTRACT

The over-exploitation of the Korba aquifer (Cap Bon, North Tunisia) has led to the drawing down of its static water level and the degradation of its quality due to the intrusion of saline water from the sea. To address this situation, treated wastewater is used for the artificial recharge of the aquifer through three infiltration basins. Treated wastewater is known to carry various emerging contaminants and pharmaceuticals as they are often not retained in traditional wastewater treatment plants. To tackle this problem the use of biochars is often recommended to conduct a second stage low-cost decontamination strategy. Indeed, biochar can be produced easily at a low cost, with different agricultural residues. In this study, the impact of biochar derived from Rosemary, Bamboo, St. John's Wort, Olive Trees, Cypress, and Palm Trees on the mobility and retention of emerging contaminants was evaluated. The first stage of this work was to evaluate the potential retention capacity of the different biochars produced in a low-cost metallic kiln with local biomass residues. Therefore we used Methylene Blue (MB) as a proxy for organic contaminants to establish adsorption isotherms to quantify their respective specific surface area and adsorption capacities. The second stage was to test the dynamic retention properties of biochar on soil monolith experiments, where the MB elution curves were analyzed with and without the addition of biochar.

2. STUDY AREA

The Korba recharge site covers an area of 4.4 hectares. This project is designed for a volume of 1500 m³/day. The site is located 500 meters north of the Korba wastewater treatment plant. It is 1.5 kilometers from the coast and is at an altitude of 15 meters "Geodetic Level of Tunisia".



Figure 1. Location of the study area.

3. METHODOLOGY

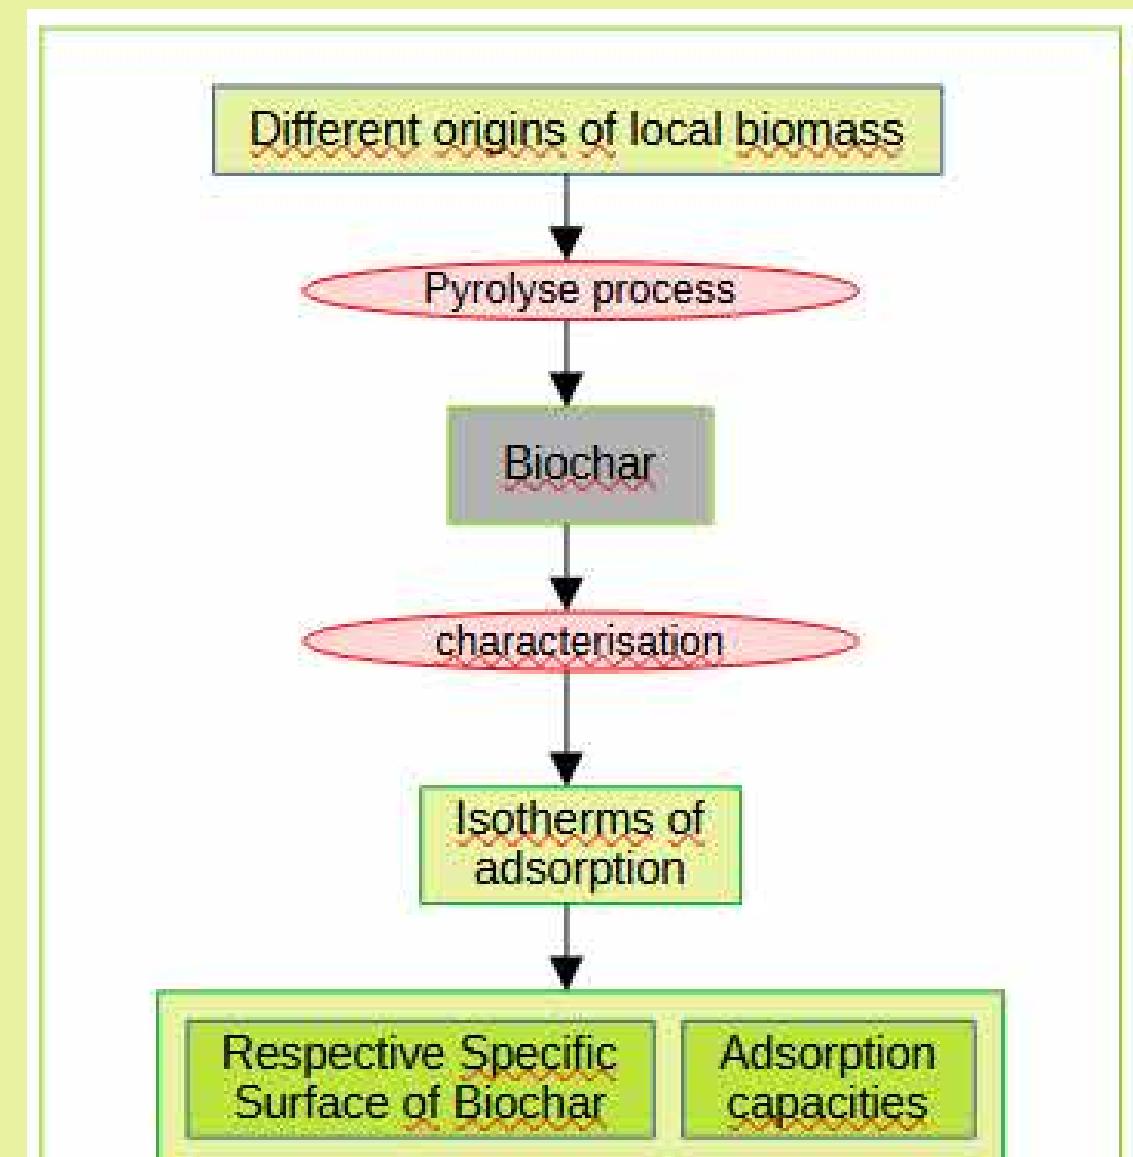
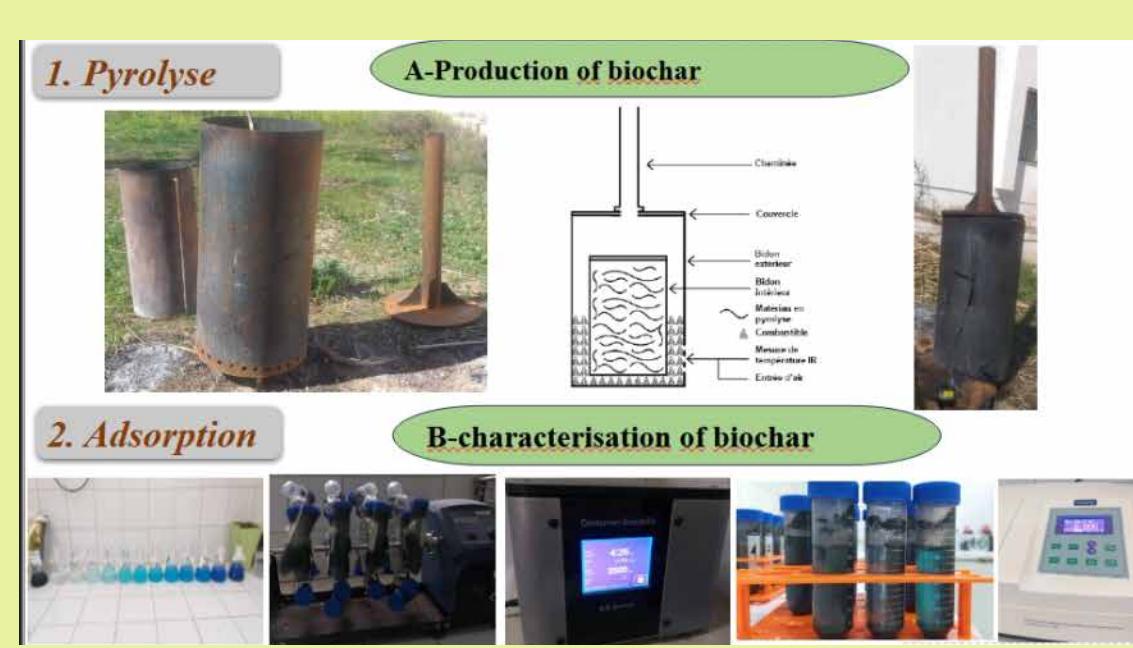


Figure 2. Biochar production and characterisation process



Figure 3. Column's laboratory experiment

To develop a conceptual model explaining biochar's effects on soil hydrodynamic properties, we conducted a series of well constrained laboratory experiments using a sand column matrix to test the effects of biochar on methylene blue retention.

4. RESULTS

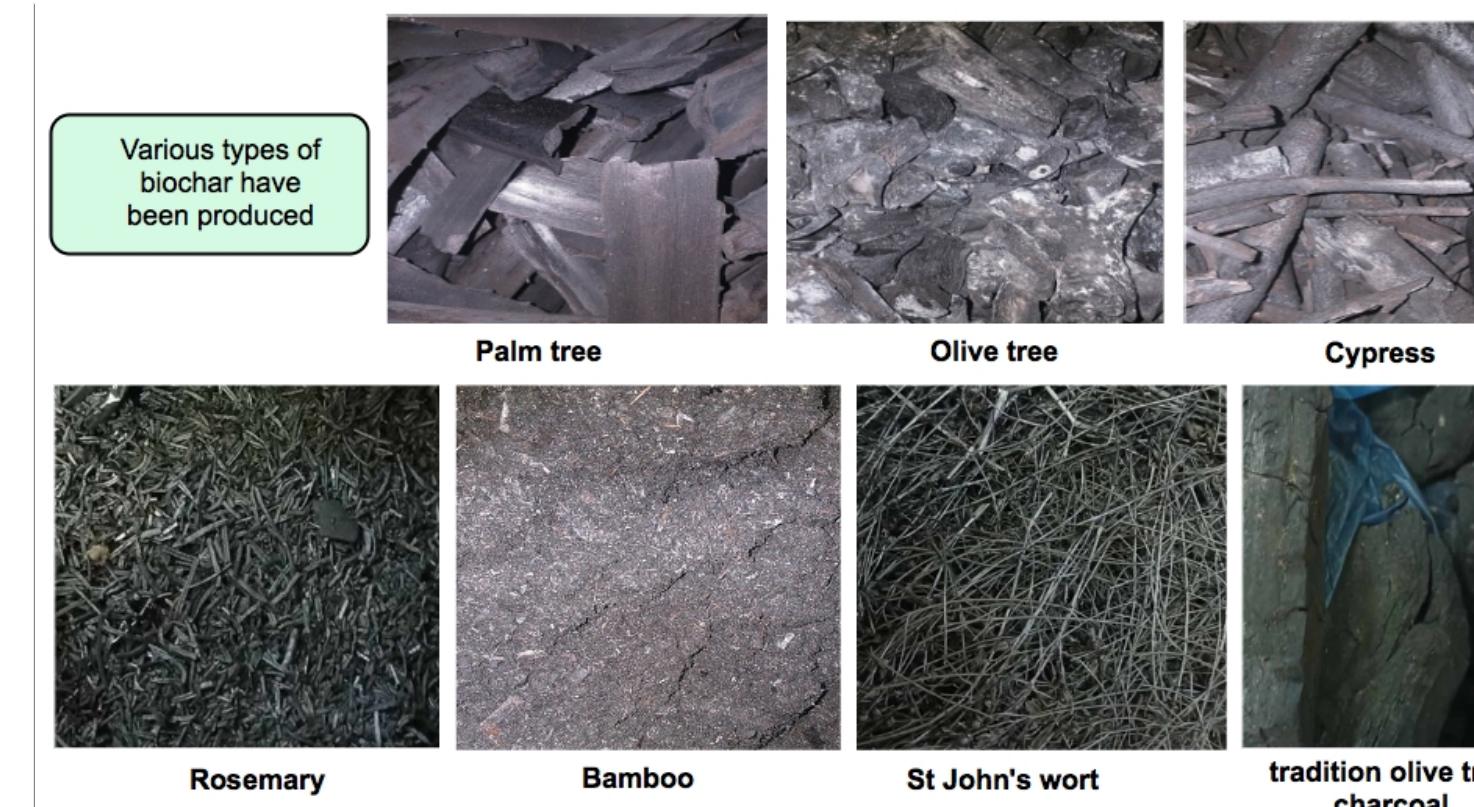


Figure 4. Different produced Biochars

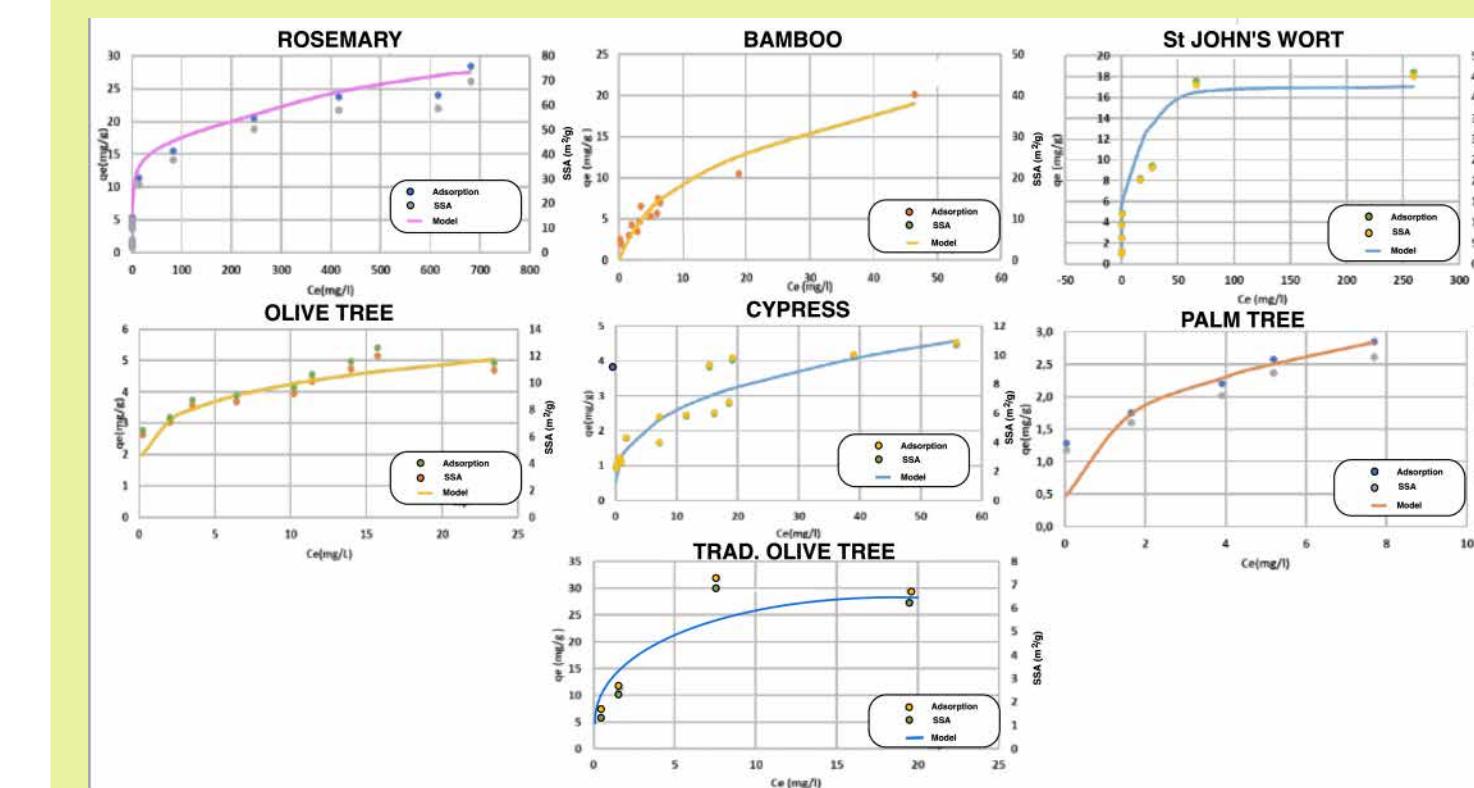


Figure 5. Isotherms of adsorption of different biochars

$$\text{Freundlich isotherm: } Q_e = K_f \times C_e^{\frac{1}{n}}$$

$$\text{Langmuir isotherm: } Q_e = \frac{K_L \times C_e}{1 + K_L \times C_e}$$

$$\text{SSA derivation: } \text{SSA} = \frac{Q_{max} \times M_{MB}}{Q_{max} - 320} \times 7.829 \cdot 10^3$$

	FREUNDLICH		LANGMUIR		SSA		
	K _f	n	r ²	K _L	Q _{max}	r ²	m ² /g
Rosemary	6.15	4.51	0.97	0.01	27.93	0.85	62.14
Palm tree	1.48	3.12	0.98	0.82	3.05	0.95	6.85
Olive tree	2.67	4.99	0.87	0.77	11.98	0.85	12.83
Bamboo	2.76	2.12	0.81	0.2	12.32	0.83	47.97
Cypress	2.68	5.00	0.84	1.86	1.94	0.43	10.91
St John wort	3.63	3.18	0.82	1.38	17.09	0.93	45.2
Trad Olive tree	7.74	2.13	0.797	0.25	32.36	0.825	7.28

Table 1. Specific Surface Area of different produced Biochars

→ Rosemary biochar has the highest SSA and was therefore used for the column experiment.


The presence of biochar appears to influence the interaction of the solution with the column, thereby modifying its behavior and distribution within the environment.



Figure 6. Core drilling of columns



Figure 7. on the left side results without taking in consideration the SSA of soil and the right side is with.

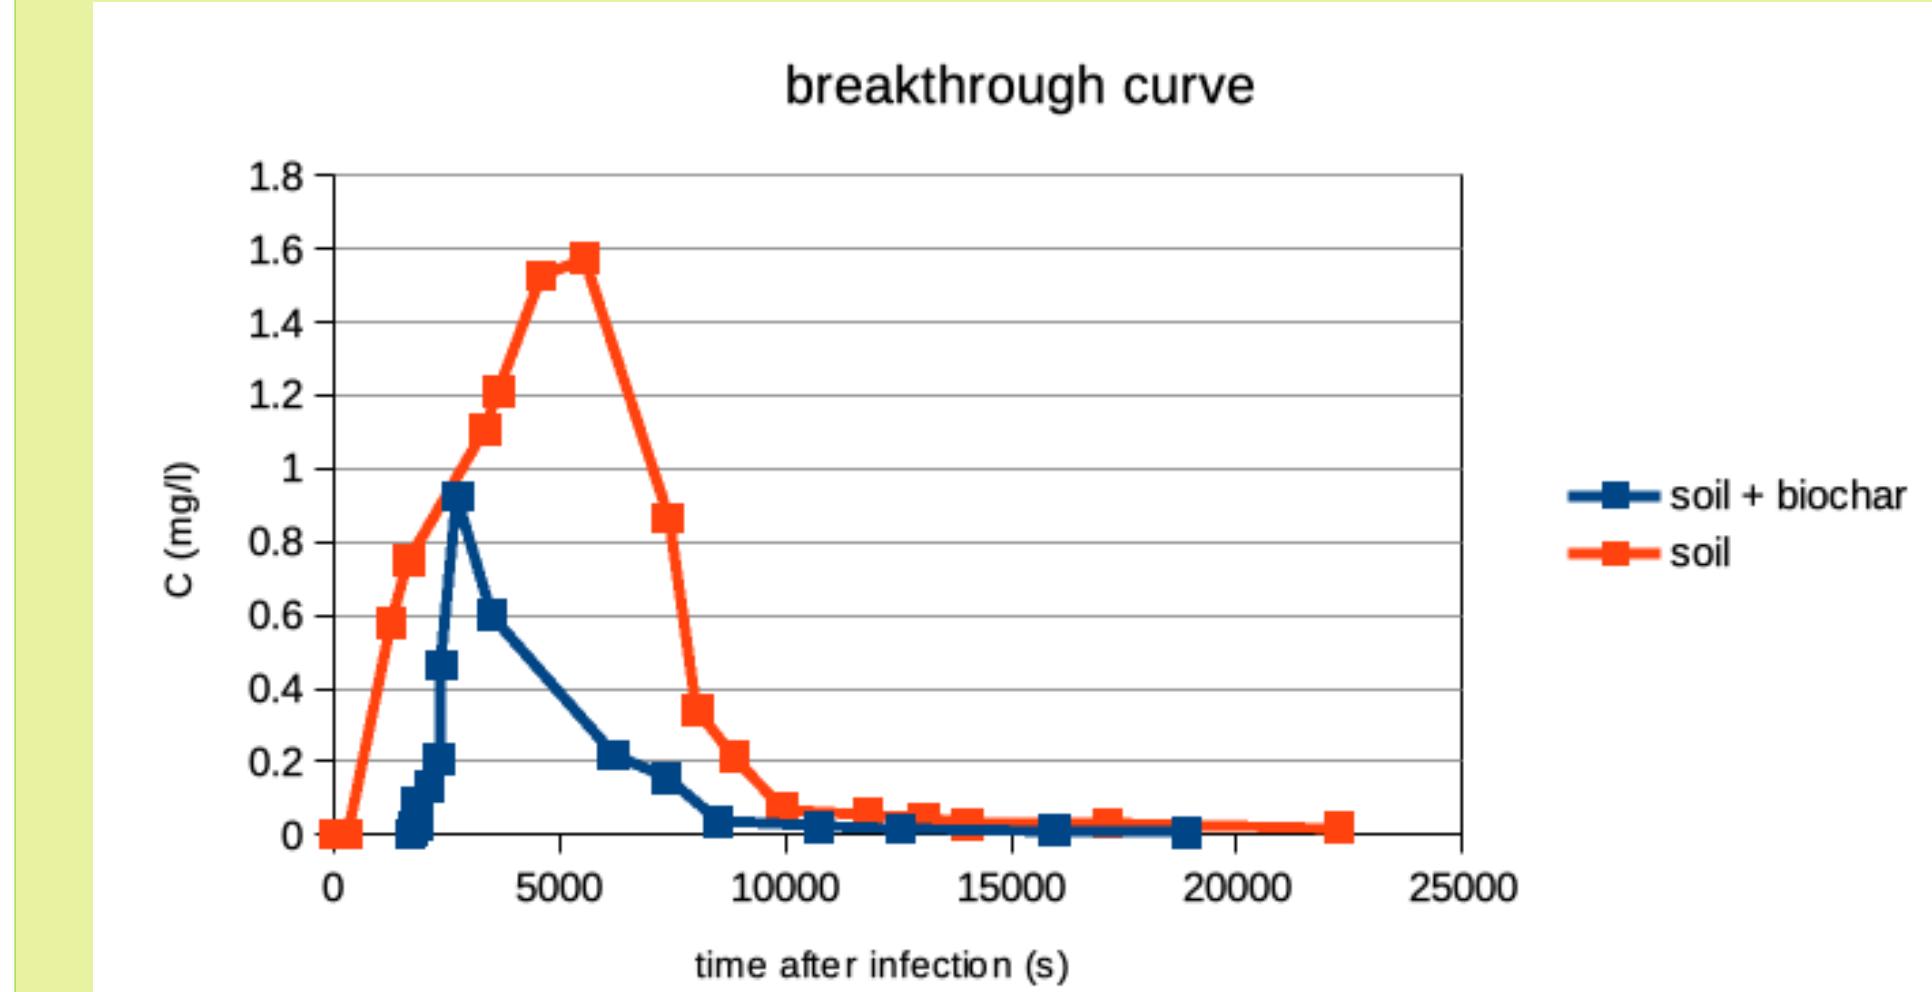

→ The rosemary biochar has adsorbed to 62% of the initial quantity of MB used in the column, while the soil only retained 3%.

5. CONCLUSIONS

→ Based on the origins of biomass, biochars shows different properties illustrated by their specific surface area.

→ Biochars issued from non ligneous biomass (rosemary, bamboo, St. John's Wort) seem to have the highest SSA.

→ The presence of rosemary biochar in the soil monoliths drastically increased the retention of MB, demonstrating its efficiency as an adsorbent filter. These results underscore the strong potential of biochar in water treatment to enhance quality by reducing pollution.

In the case of the column without biochar, a larger amount of water was needed for drainage after injection before observing clarification of water.

