EPSAT : STUDY OF RAINFALL OVER THE SAHEL AT SMALL TIME STEPS USING A DENSE NETWORK OF RECORDING RAINGAUGES.

V. THAUVIN, T. LEBEL

* ORSTOM. Laboratoire d'hydrologie. Montpellier. France.

Introduction.

The study area. The high density, static memory raingauge network of the EPSAT-Niger experiment presented in an accompanying paper by Hoepffner et al. was designed with the aim of studying in detail the Sahelian precipitation and of determining the best way to measure it. This network covers an area east to Niamey, measuring one degree in longitude(108 km) and one degree in latitude(111 km). The basic pattern is a regular grid, with a 12x12 km^2 mesh (see fig.2 in Hoepffner et al.). A Target Area, made of sixteen gauges, was also set up. This Target Area is roughly a 10x10 km^2 square. The center of the Target Area is 1x1 km^2, instrumented with four raingauges. A first subset of 37 raingauges was installed in 1988, an additional 16 by mid August 1989 and the remaining 25 by mid September, thus providing a network of 78 raingauges spread over the 108x111 km^2 study area. While the partial network available in 1988 allowed only for a general description of the spatial pattern of the rainfall over the study area, the 1989 network has the required density to carry out studies at smaller scales. Unfortunately, given the schedule of the conference, it was impossible to process in time the data acquired after mid August 1989. The results presented herein are thus only a first overview of the enhancement of tropical rain systems knowledge at various time scales that can be expected from such a network.

Climatic conditions in 1988-1989. The Sahelian precipitation regime is characterized by the succession of one dry season (October-May) and one rainy season (June-September), the maximum monthly rainfall occuring generally in August. The yearly average rainfall for the period 1905-1975 is 585 mm (Brunet-Moret et al., 1986). With 558 mm of rainfall recorded at the station of Niamey in 1988 and over 600 mm in 1989, the total rainfall of the past two years was good as compared to that of the nine previous years. As a matter of fact, from 1979 to 1987 the yearly total was over 500 mm only once in 1975, and four times in the order or below the dry ten year rainfall which is 424 mm. The years 1988 and 1989 may thus be considered "normal", after a long period of dry years, at least from the yearly total viewpoint.

Geostatistical techniques to analyse rainfall spatial distribution. Given the point nature of raingauge data, any attempt at mapping them or at computing areal values requires to interpolate them. Finding the best methods to perform such interpolations has long been identified as a major research field in hydrology. Our purpose here is not to elaborate on this topic, but since contour mapping and areal rainfall computation will be largely used in this paper to illustrate our results, some indications regarding the methods selected will be helpful.

Following the work of Creutin and Obled (1981), several studies (e.g. Tabios III and Salas, 1985; Lebel et al., 1987) have shown that optimal linear interpolation techniques perform generally better than their counterparts which do not make use of the statistical structure of values observed in a 2D space. These results hold for medium density networks, since when the density is too low the statistical structure can not be studied, and when it is high (with respect to the spatial variability) a local arithmetic mean is accurate enough. Based on these conclusions, kriging will be used here to interpolate the point data, mainly because it allows to identify the spatial structure function separately

for each realization of the random process. Kriging, a method developed by G. Matheron belongs to the BLUE (Best Linear Unbiaised Estimators) family of interpolation techniques, using the variogram as the structure function describing the data correlation in the 2D space. An experimental variogram is computed from the experimental data, and a theoretical model is fitted which is then used to fill the variance-covariance matrix of the interpolation system (for more details see e.g. Delfiner and Delhomme, 1973). Two models of variogram will be used below:

the linear model :

$$\gamma(h) = \gamma_0 + bh \qquad (b>0).$$

the spherical model :

$$\gamma(h) = \gamma_0 + (\alpha - \gamma_0).[3/2\ h/a - 1/2(h/a)^3]$$

for 0<h<a

$$\gamma(h) = \alpha \qquad (h>a).$$

where γ, γ_0, and α are in mm^2 (for rainfall measured in mm), and h and a are distances in metric units.

In the latter model, a is the range, that is the distance beyond which no correlation exists any longer between two points. For h< 2/3a, the spherical model is almost identical to a linear model with b= 3α/2a. Since the identification of the parameter a largely depends on the observations available at large distances (as compared to the decorrelation distance of the phenomenon), it is frequent that
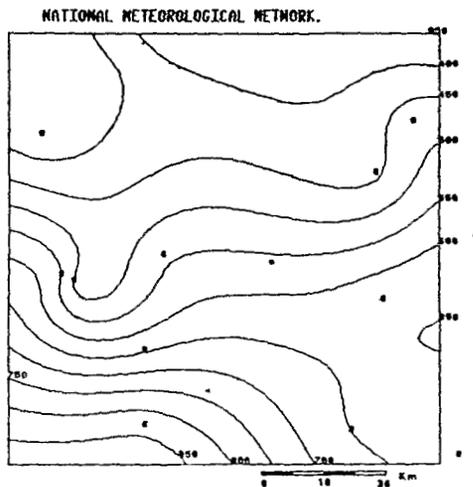
NATIONAL METEOROLOGICAL NETWORK.

Fig. 1. 1988 yearly rainfall (mm). Daily raingauge network of the Niger meteorological service (11 stations within the study area and 6 stations in the vicinity; all seventeen stations used for the contour mapping).

either model may be used with similar results as long as the interpolation is performed over relatively short distances. This point will be illustrated below when studying the spatial distribution of rainfall cumulated over a whole precipitation event.

Preliminary studies in 1988.

Pattern of monthly rainfall fields. The seventeen stations of the conventional raingauge network of the meteorological service of Niger are located within (11 stations) or in the vicinity (6 stations) of the EPSAT-Niger study area. This allowed for the drawing of the isohyetal map of the total rainfall, as shown in figure 1. The rainfall is seen as a well organized process displaying a decreasing gradient from the south northward. The EPSAT-raingauges could not be used to get more information about the 1988 yearly rainfall since the EPSAT-Niger had been progressively installed all along the rainy season. It is nevertheless possible to compare the monthly rainfall isohyetal maps obtained from the conventional raingauge network and from the complete network (conventional gauges and EPSAT gauges). In September 1988 for instance, 25 EPSAT stations have been fully operating, thus providing a complete network of 42 raingauges, which may be used concurrently with the meteorological network to draw contour maps of the September monthly rainfall (fig. 2). The contour mapping was performed over a 100*100 km², a zone slightly smaller than the basic study area, and using a linear variogram.

The map of figure 2a (meteorological network) is rather smooth with the noticeable exception of an irregularity created by the station of Birni N'Gaoure which recorded 66 mm only while the values at all the nearest stations are over 120mm.

In figure 2b is shown the contour map obtained from the complete network of 42 stations (met. + EPSAT stations). The pattern is dramatically different, globally as well as in detail. Indeed such a chaotic structure as the one observed over the Target Area, is expected for storm or daily rainfall contour maps, but in no way for monthly rainfall during the rainy season. As a matter of fact, eighteen different rainfall events were recorded during september 1988, among which twelve were well organized storms (more than half of the stations recording rainfall during more than two hours). The accumulation of such a large number of storms is generally believed to result in a strong smoothing, which is not the case here. This means that, in these regions, the maps drawn using networks with an interdistance between stations greater than twenty kilometers give a very simplified picture of the monthly
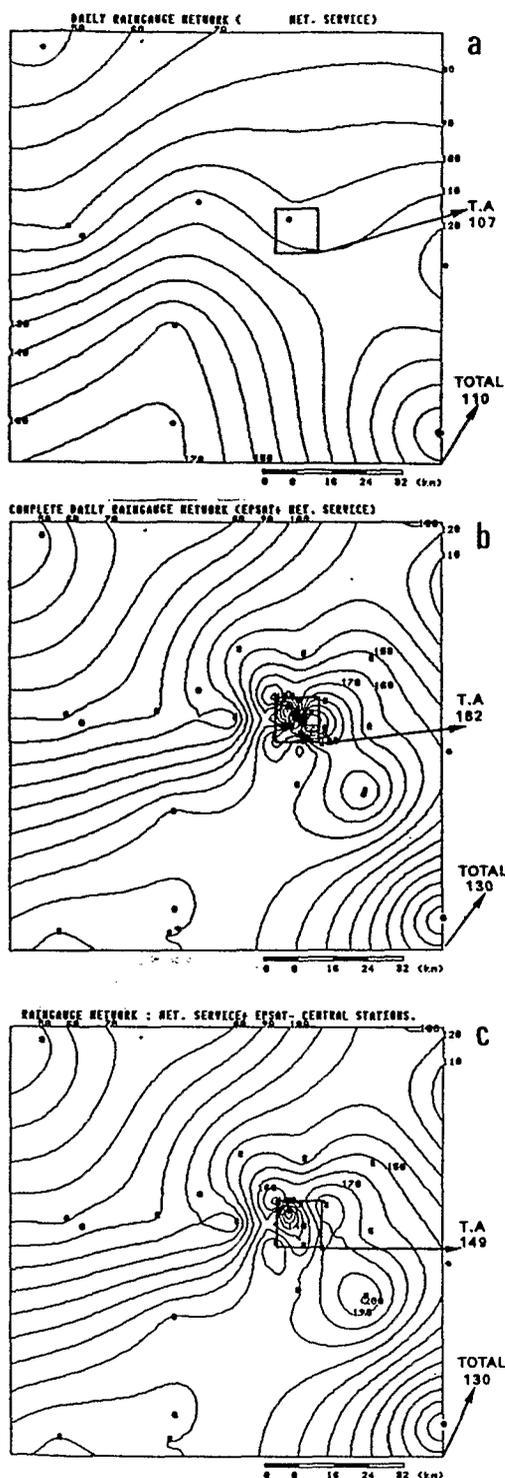
Fig. 2. September 1988 monthly rainfall (mm).
Comparison of the isohyetal maps obtained with
three different networks. a : meteorological
stations; b : meteorological and EPSAT(1988)
stations; c : same as be except for the removing of
six stations in the Target Area. The numbers on the
right side are areal rainfall *i)* over the 100x100 km2
square (total) and *ii)* over the Target Area (T.A.).

rainfall spatial distribution. It may
of course be objected that the very
dense central network creates a
singularity biaising the perception of
the rainfall field. Yet the local
perturbations are not created by the
network : they are observed (twelve
stations of the Target Area were
operating at that time). This suggests
that similar unobserved "singularities"
may exist elsewhere, and prevent us
from deciding whether the "anomaly" of
Birni in figure 2a is related to a
measurement error or to a strong local
variation of the rainfall field.

In order to check the influence of
the Target Area on the general pattern
of the contour map, the central
stations were removed (six out of a
total of eight have operated properly
all along september 1988). This opera-
tion has the consequence of erasing
some local irregularities, but the
strong central gradient remains clearly
visible, again showing that even at the
monthly scale the rainfall fields are
not as smooth as generally thought.

Areal rainfall. It is of first impor-
tance to hydrologists to assess the
consequences of such dissimilarities
when it comes to compute areal rainfall
which are the only meaningful variables
in water resources management, the
improvement of which is the remote but
ultimate goal of the EPSAT-Niger expe-
riment. Areal rainfall over reference
areas were therefore computed using a
direct kriging estimation procedure
(for more details, see e.g. Bastin et
al.,1984 and Lebel et al., 1987). The
structure function used was a linear
variogram with no nugget effect (γ_0 =
0). While the choice of such a function
would deserve to be discussed in more
details, it is believed that the
results given below would be only
slightly modified by using different
structure functions (especially to take
into account an obvious linear drift).
Two reference areas were chosen : 1)
the 100x100 km^2 square and 2) the
Target Area (10x10 km^2). The results of
the computation are given in figures
2a, 2b and 2c for each network
respectively. While the areal rainfall
computed over the big square varies
little (110, 130, 130 mm), there are
large differences between the estimates
over the Target Area.

Although these results need to be
validated by a more thorough inves-
tigation which is underway using the
1989 data and working at smaller time
steps, a tentative interpretation is
already possible. At a scale of 100x100
km^2, ten stations are enough to provide
a fairly good estimate of the monthly
areal rainfall. Adding more stations
improve slightly the accuracy. Beyond a
density of around one gauge for 400-500
km^2, more details are obtained but they
are no longer relevant to increase the
accuracy of the estimation (it is
noteworthy that the values given in
figure 2b and 2c are identical).

At the lower scale of 10x10 km^2, the error involved in using the meteorological network (only 1 station within the Target Area) is probably very large since the computed areal rainfall is only 107 mm against 149 mm and 182 using the two other networks (respectively with 6 and 12 stations within the area). Note that all the stations were used for the computation and not only those of the Target Area. Here again at least ten stations are probably needed to get a stable estimate of the monthly areal rainfall.

Of course this result is more a provisional rule of thumb than a very precise and definite answer to network design problems in Sahelian regions. In any respect, it does not hold for smaller spatial scales (would it be necessary to install ten gauges over a 10x10 m^2 square to get a precise estimate of the monthly rainfall over this area ?), and it would be of great interest to obtain figures for smaller time steps.

Rainfall spatial distribution in Sahelian squall lines : a first glance.

At the time of writing this paper, the data of about fourty raingauges only had been processed for 1989. The first significant rainfall were observed in mid-June, and by mid-August several interesting mesoscale convective systems were recorded. The most efficient, in terms of rainfall intensities and total amount, was the convective system which gave 155 mm of rainfall at Tafakoira the 4th of August. It may be seen in figure 3 that, while the isohyetal map of the event is relatively smooth, the point rainfall intensity pattern greatly varies from one station to another as soon as the raingauges are located a few kilometers apart. At Tafakoira the hyetogram is somewhat different from the typical squall line hyetogram as shown by Hoepffner et al.(this conference). The structure of this event thus appears rather complex and it would be beyond the scope of this general presentation to study it in detail. By contrast, the two convective systems observed on June 29th and July 11th are simple and representative examples of Sahelian squall lines.

It typically takes between three and six hours to a squall line to pass over the study area. The resulting cumulative rainfall (fig. 4a and 5a) display a good spatial organisation, but variations across the area may be large, with strong local gradients. Using either a linear (29th June) or a spherical model (11th July) to fit the experimental variogram, gives a fairly similar model between 1 and 30 kilometers, the slope of which is about .45 mm^2/km.

4 August 1989

☐ HYETOGRAM TIME STEP:5 Minutes

☐ HYETOGRAM ORDINATE
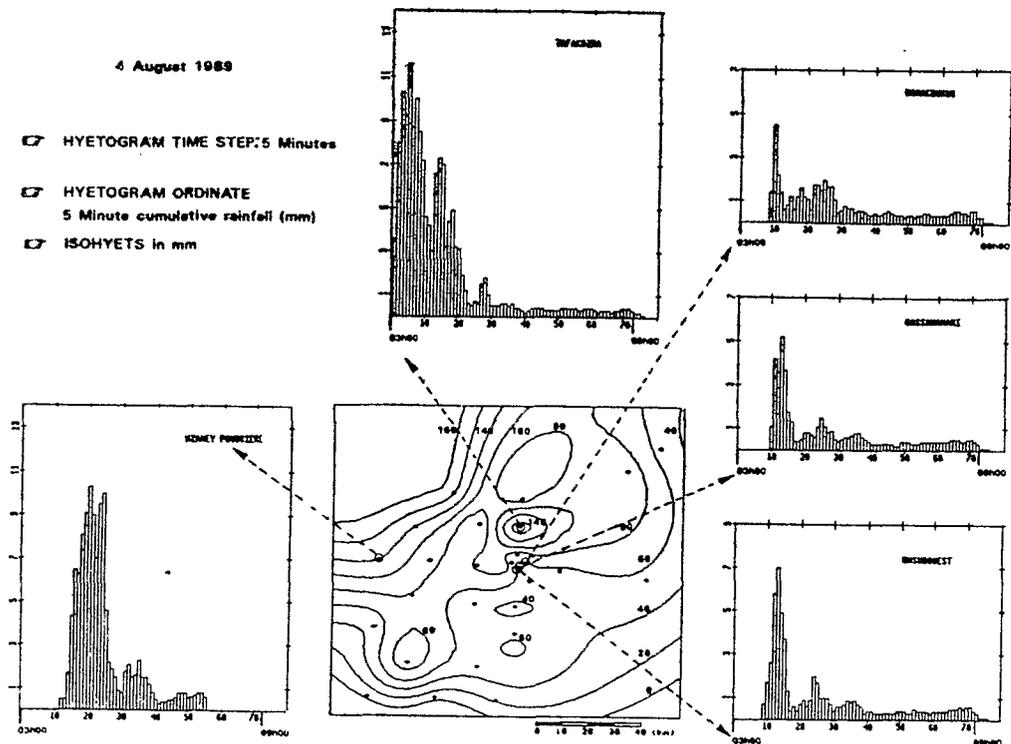5 Minute cumulative rainfall (mm)

☐ ISOHYETS in mm

Fig. 3. Isohyets of the 4th August storm, with the corresponding hyetograms at five stations.

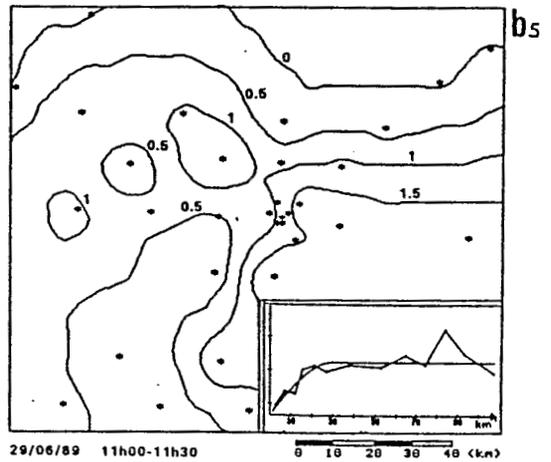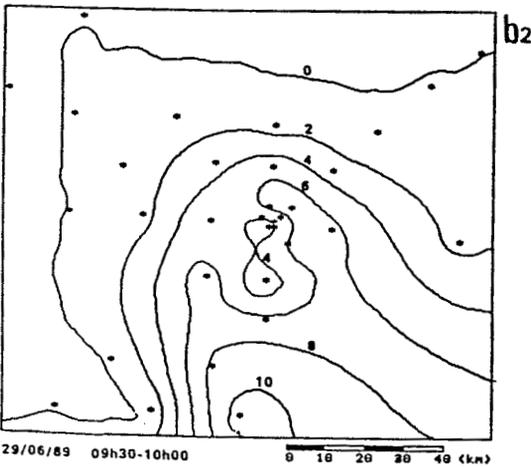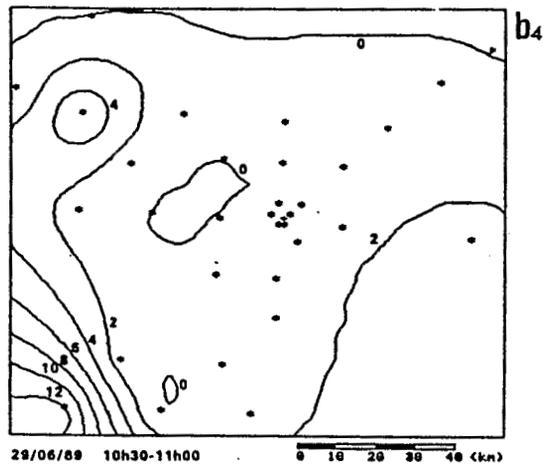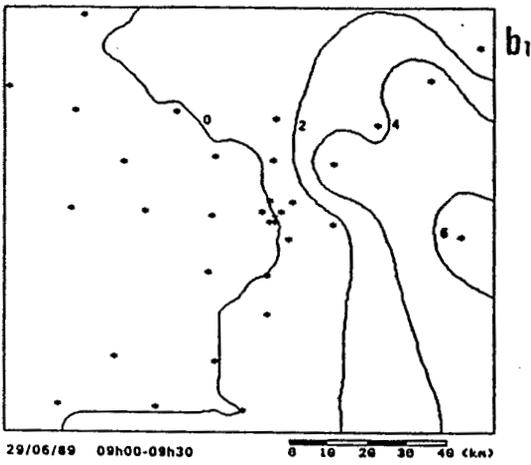EPSAT NIGER NETWORK (34 GAUGES) – CUMULATIVE RAINFALL (MM)
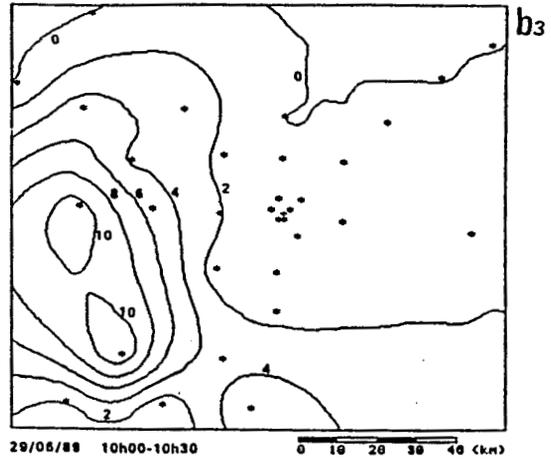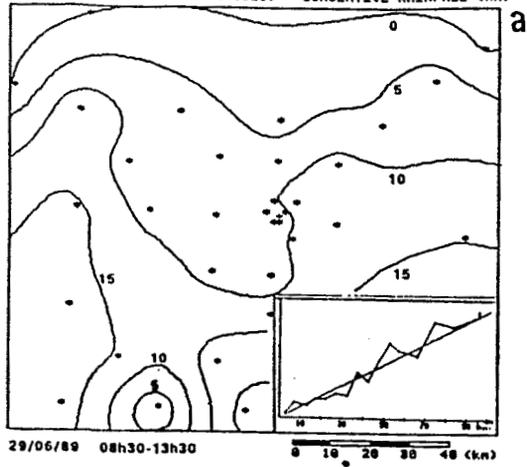

Fig. 4. Isohyetal maps of the 29th June squall line. **a** : cumulative rainfall for the whole event (inset : the corresponding variogram).**b**₁ through **b**₄: convective rainfall region. **b**₅ : stratiform rainfall region.

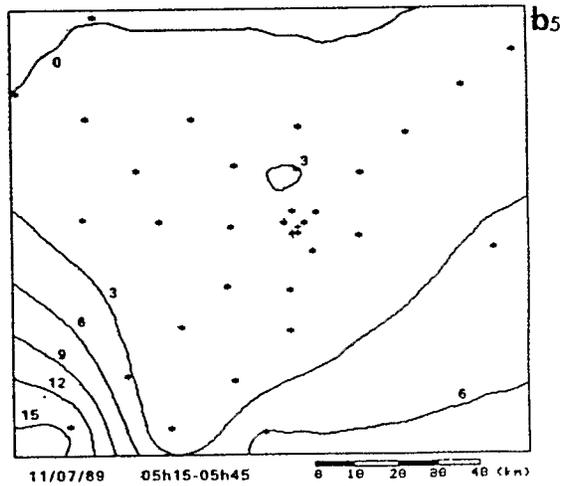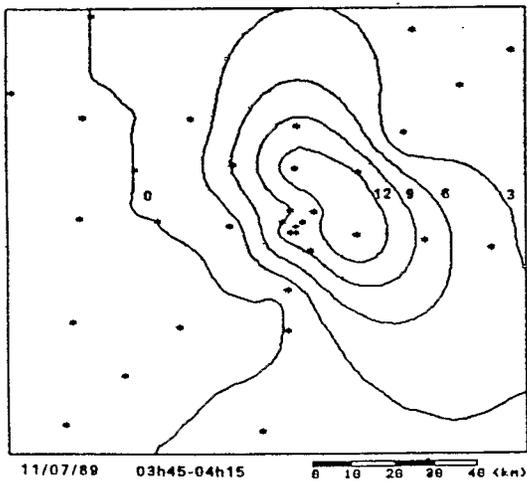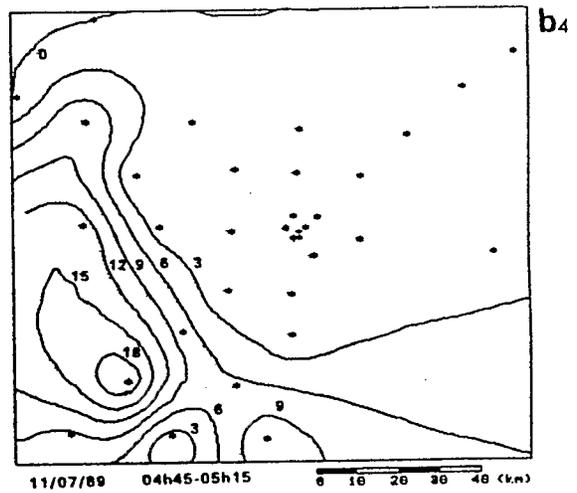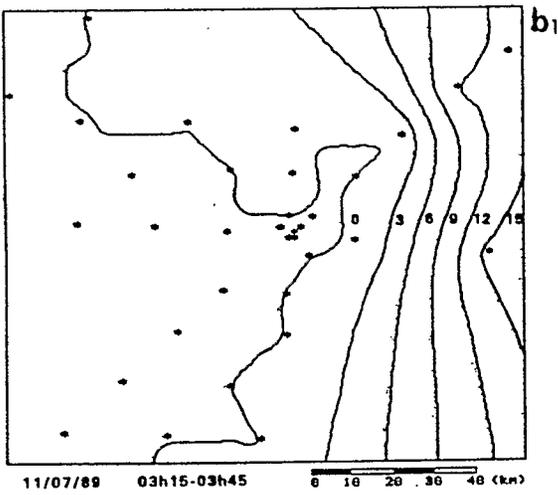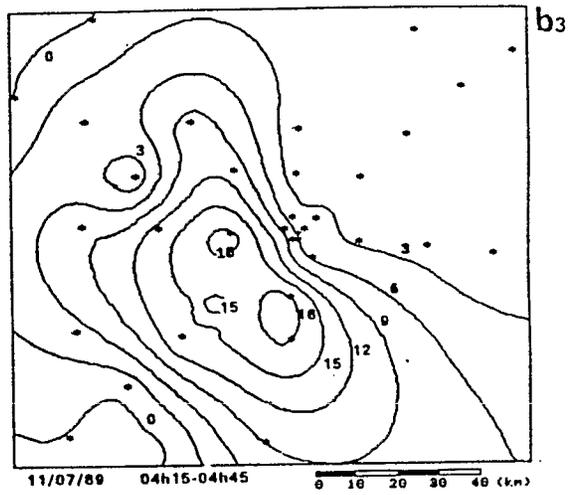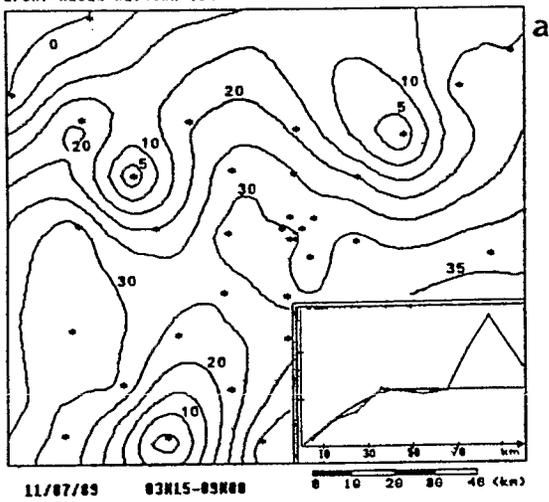EPSAT-NIGER NETWORK (34 GAUGES) : CUMULATIVE RAINFALL

Fig. 5. Same as fig.4 except for the 11th July 1989 squall line.

The area covered by the network as well as its density allows the study of the squall line movement with an appropriate time step ranging from 15 to 30 minutes. At such time steps the convective part of the squall line is easily identified as well as the movement.(fig. 4 and 5). At smaller time steps, strong local variations or the low number of stations affected either hinder the global perception or prevent the drawing of precise rainfall contours. With a time step of 30 minutes the size of the basic 3 mm contour is between 60 and 80 kilometers in the movement direction. This corresponds to a 40-50 km wide rain zone travelling at an average speed of 50 to 60 km/h. These observations are in close agreement to those of Roux et al (1984)., made during the COPT 81 experiment.

Keeping only the stations affected by the convective zone of the squall line at a given time step, it was possible to study the variogram of 30 minute convective precipitation. The aspect of this variogram depends on the presence of the Target Area stations in the sample. When they are present it is difficult to fit a model accounting for both the small and the large distance behaviour of the experimental variogram. When they are not present the number of stations is often too small to obtain a reliable experimental variogram. The complete network will thus be required to determine the best way to compute areal rainfall at this time step, as far as the squall line convective region is concerned.

A similar study was performed for the stratiform region, the area of which is two to four times as large as the convective one. The rainfall distribution is fairly homogeneous within this region (fig. 4.b5 and 5. b5), and the associated variograms are regular (inset in fig.5. b5). A spherical model fits the experimental variograms well. The inclusion of the stratiform precipitation in the event cumulative rainfall is one reason for the smoother spatial pattern of the total rainfall as compared to the 30 minute convective rainfall.

It must be underlined that these first results, however partial, are an interesting complement to the squall line studies performed earlier by atmospheric physicists (e.g. Houze, 1977, Roux et al., 1984). While sophisticated doppler radar measurements allowed the description and understanding of the main features of the squall lines, the ground rainfall produced by such convective systems had yet to be studied in detail in Sahelian regions.

Perspectives.

As a cooperative effort of atmospheric physicists and hydrologists, the EPSAT-Niger experiment has the important goal of linking a better understanding and description of the squall lines to better estimation capabilities of ground rainfall fields. The first step in that direction is to determine the ability of raingauge networks to provide independently reliable point and areal rainfall estimates at various space and time scales. A preliminary measurement campaign in 1988 and the partial processing of the 1989 EPSAT-Niger recording raingauge data has given some hints on what might be the future importance of the experiment results.

1. To begin with, it is noteworthy that at medium scales (10 to 100 km in space and 30 minutes to a few hours in time), there is a strong agreement between the atmospheric structures identified by atmospheric physicists and the ground rainfall fields. In particular the separation of a squall line cumulative rainfall into a convective and a stratiform rainfall is often possible. The convective rainfall generally amounts to about two thirds of the squall line cumulative rainfall at a given point; the convective region is sufficiently well organized in space to allow for interpolation at time steps ranging from 30 to 180 minutes with a 12x12 km^2 mesh network. The stratiform rainfall amounts for the remaining component (approximately one third) and is more smoothly organized in space than the convective one; it is consequently still easier to interpolate. Given the differences between the convective region and the stratiform region, it is preferable, when possible, to separate these two regions when interpolating the point data or computing areal rainfall. Regarding areal rainfall, it was shown that, at the monthly scale, the network density required to compute reliable areal rainfall varies depending on the surface area concerned. For 10000 km^2 this density is in the order of one gauge for 500 to 1000 km^2. For 100 km^2 it is about one gauge for 50 to 100 km^2. These figures must be taken as first estimates. They give a rough idea of the ground based instrumentation that would be needed in Sahelian countries to obtain good areal rainfall estimates over small surfaces. Moreover greater densities would have to be considered for smaller time steps. Further work is thus underway to provide more accurate estimates of the error involved in areal rainfall computation, for time steps varying from 30 minutes to a few days. This should be possible as soon as the 1989 data processing is completed.

2. At smaller scales in space (below a 5 km resolution), the spatial variability is very large and possibly may not be described using the geostatistical tools used for larger space steps. The smaller the time step, the greater is this variability, and it would probably require radar data to study it in detail. Nevertheless even monthly rainfall display strong irregularities at such small space scales, and the Target Area of the EPSAT-Niger network could provide the relevant information to get a better appreciation of the hydrological consequences of this fact.

3. The EPSAT-Niger network covers too small an area to provide a good insight of the ground rainfall fields at larger space scales (a few hundred to a few thousand kilometers). Here remote sensing data (whether radar or satellite imagery) will have to be utilised, and the EPSAT-Niger network will provide the ground truth which is compulsory to calibrate them.

References

Bastin, G., B.Lorent, C. Duque, and M. Gevers , 1984. Optimal estimation of the average rainfall and optimal selection of raingauge locations.1984. Water Resour. Res., 20(4), 463-470.

Brunet-Moret, Y., P. Chaperon, J.P. Lamagat, M. Molinier, 1986. Monographie hydrologique du fleuve Niger. Tome II - Cuvette lacustre et Niger moyen. Ed. ORSTOM. Paris. Collec. Monographies Hydrologiques N° 8. 506 P.

Creutin, J.D., and C. Obled, 1982. Objective analysis and mapping techniques for rainfall fields : an objective comparison. Water Resour. Res., 18(2), 413-431.

Delfiner, P. and J.P. Delhomme, 1973. Optimum interpolation by kriging in Display and analysis of spatial data, edited by J.C. Davis and M.J. Mc Cullagh, 96-114, Jonh Wiley, New York.

Hoepffner,M., T.Lebel and H.Sauvageot, 1989. EPSAT-Niger : a pilot experiment for rainfall estimation over West Africa. This conference.

Houze, R. A.,Jr., 1977. Structure and dynamics of a tropical squall line system observed during GATE. Mon. Wea. Rev., 105, 1540-1567.

Lebel, T., G. Bastin, C. Obled, and J.D. Creutin, 1987. On the accuracy of areal rainfall estimation : a case study. Water Resour. Res., 23(11), 2123-2134.

Roux, F., J. Testud, M. Payen and B. Pinty, 1984. West african squall line thermodynamic structure retrieved from Dual-Doppler radar observations. J. Atmos. Sci., 41, 3104-3121.

Tabios III, G. Q., and T. D. Salas, 1985. A comparative analysis of techniques for spatial interpolation of precipitation. Water Resour. Bull., 21(3), 365-380.